



MATRIX 355

Solid-State, Q-Switched Laser

MATRIX lasers are optimized for cost-sensitive applications requiring high throughput without compromising process quality. The MATRIX portfolio is manufactured utilizing Coherent's PermaAlign™ technology, a special process for optimal adjustment and fixation of optical components by a soldering process. This guarantees best optical alignment and stability over the whole lifetime of the product.

For pumping, Coherent's AAA™ (Aluminum-free Active Area) pump diodes with MTBFs >40,000 hours are applied. The MATRIX lasers are manufactured in clean-rooms and then hermetically sealed. The result is reliable, hands- and maintenance-free operation over thousands of hours.

The MATRIX UV portfolio features power levels from 0.5W to 8W. The unique multi-pass harmonics enable lower power density inside the frequency conversion crystal, resulting in longer system life, outstanding pointing stability and the lowest pulse-to-pulse noise commercially available.

The MATRIX UV BE model (= MATRIX UV with internal Beam Expander) is designed to adapt directly to laser scan heads to ease integration for most marking applications.

FEATURES

- Superior optical performance
- Complete control over pulse energy and timing
- PermaAlign solder-bonded optics technology
- Robot-assisted, cleanroom-built and hermetically sealed
- AAA pump diodes for unmatched lifetime
- Virtually no downtime, maintenance-free operation over thousands of hours

APPLICATIONS

- Marking of Complex Plastic Structures
- Laser Trimming of Embedded Passives with Diode-Pumped Solid-State Lasers
- Inside Glass Marking
- Laser Direct Patterning
- LED Package Marking
- Solar P1 to P3
- Thin-film Scribing
- Rapid Prototyping




SPECIFICATIONS	MATRIX 355-M1	MATRIX 355-1-60	MATRIX 355-5-50	MATRIX 355-8-50	MATRIX 355-1-60-BE ²
Average Power (W)	0.5 at 60 kHz	1 at 60 kHz	5 at 50 kHz	8 at 50 kHz	1 at 60 kHz
Recommended Power Range (%)	70 to 100	50 to 100	50 to 100	70 to 100	50 to 100
Pulse Repetition Rate (kHz)	up to 100	up to 100	up to 150	up to 150	up to 100
Pulse Duration ² (ns)	<30	<25	<30	<25	<25
Pulse-to-Pulse Stability ² (%) (rms)	<5	<2	<2	<2	<2
Beam Parameters (nominal)	0.23 mm and <2.8 mrad	0.23 mm and <2.8 mrad	0.23 mm and <2.8 mrad	0.23 mm and <2.8 mrad	2.2 mm and <0.5 mrad
Circularity (%)	>90	>90	>85	>85	>90
Spatial Mode	TEM ₀₀				
Output Power Stability (%) (8h/±3°)	<2				
Temperature Range (baseplate)	15°C to 50°C (59°F to 122°F)				
Maximum Heat Load (W)	<350	<350	<450	<450	<350
Static Alignment	±0.2 mm, ±2 mrad				
Maximum Warm-up Times from Cold Start from Warm Start	<20 minutes <5 minutes				
ENVIRONMENTAL SPECIFICATIONS					
Temperature Operating Non-operating	15°C to 40°C -20°C to 50°C	15°C to 40°C -20°C to 50°C	15°C to 35°C -20°C to 50°C	15°C to 30°C -20°C to 50°C	15°C to 40°C -20°C to 50°C
Altitude Operating Non-operating	0 to 10,000 ft. 0 to 45,000 ft.				
Relative Humidity (%) (non-condensing) Operating Non-operating	0 to 90 0 to 95				
Shock Operating Non-operating	±1g dynamic EN 60068-2-6 ±10g EN 60068-2-26				
POWER SUPPLY SPECIFICATIONS					
Power Supply Dimensions (H x W x D)	100 x 131 x 335 mm (3.9 x 5.2 x 13.2 in.) open-frame PCB; can be mounted in 3HE 19-in. rack mount				
External Control	RS-232 interface, TTL QS control				
Input Power Requirements Input Voltage (VAC) Input Power Power Supply (VA)	90 to 240, 50 to 60 Hz maximum typical 750 ≤350				

¹ AVIA Ultra 2000 compatible beam parameters through internal beam expander (BE).



² At specified rep. rate.

MECHANICAL SPECIFICATIONS

MATRIX 355-M1 Laser Head

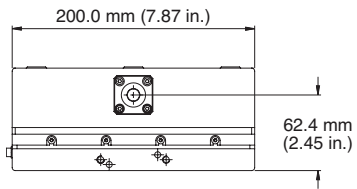


Front View

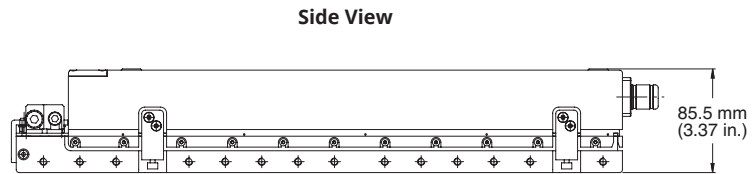


Top View

MECHANICAL SPECIFICATIONS



**MATRIX 355
Laser Head**



Front View

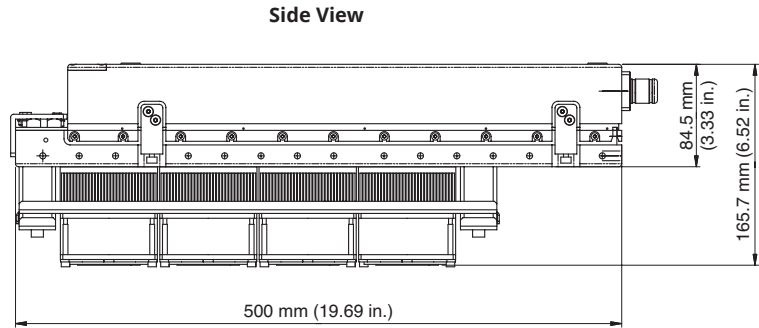

Side View

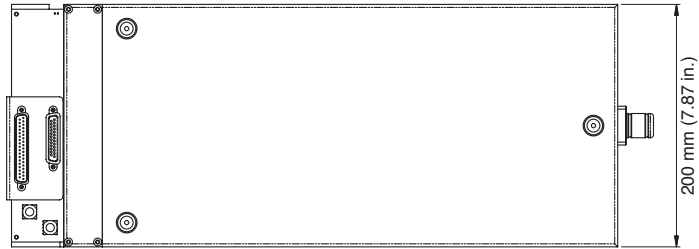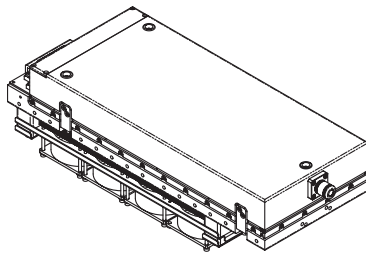

Top View



Coherent, Inc.,
5100 Patrick Henry Drive Santa Clara, CA 95054
p. (800) 527-3786 | (408) 764-4983
f. (408) 764-4646

tech.sales@Coherent.com www.Coherent.com

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice. Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all MATRIX lasers. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative. Printed in the U.S.A. MC-009-09-0M0317Rev.F Copyright ©2017 Coherent, Inc.

